FLOATLESS RELAY: AFS-GR



PRODUCT SPECIFICATIONS

CLASSIFICATION		FLOATLESS RELAY
MODEL		AFS-GR
DIMESIONS(mm)		50HЎБ40WЎБ57.5D
SOCKET TYPE		PF083A
SENSING MODE	GENDRAL	-
	HIGH SENSING	-
	LONG DISTANCE	-
	LOW DENSITY	-
	TWOLINES	AFS-GR
RATED VOLTAGE		AC:110V,220V,240V,50/60HZ
INDICATOR OPERATING		Two LED's use fro two status
OPERATE VOLTAGE		85~110%of rated voltage
SECND VOLTAGE		8VAC (except highsensing 24VAC)
OPERATE RESISTANCE		4K MIN.(GENERAL)
RELEASE RESISTANCE		15K MIN.(GENERAL)
RESPONSE TIM		OPERATE:80 MSEC MAX.RELEASE:160MSEC MAX.
CONTACT RATING		5A,250VAC(RESISTIVELOAD)
LEGTH OF CABLE		1KMMAX.(GENERAL)
LIFE	MECHANICAL	5ЎБ10^6TIMES MIN
	ELECTRICAL	10^5 times min
INSULATION RESISTANCE		100M (DC 500V)MIN
DIELECTRIC STRENGTH		1500VAC,50/60HZ,FOR 1MINUTE
CONSUMED POWER		3.2VA
AMBIENT TEMPERATURE		-10Ўж~+55Ўж
AMBIENT HUMIDITY		45~85%RH
WEIGHT		150g

CONNECTION DIAGRAMS&TIMING CHART AFS-GR

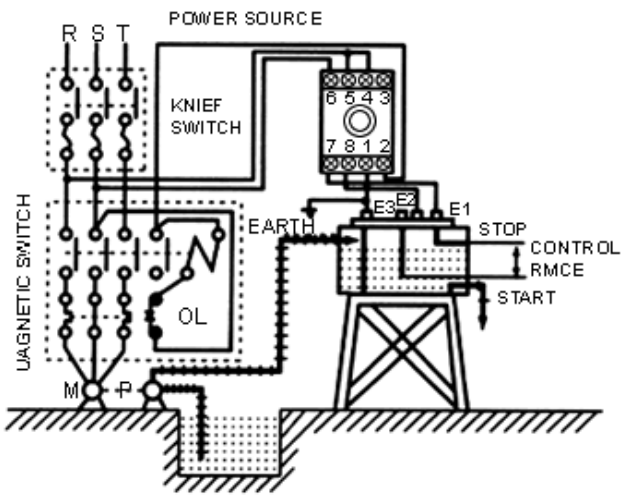

General Water-supply Running

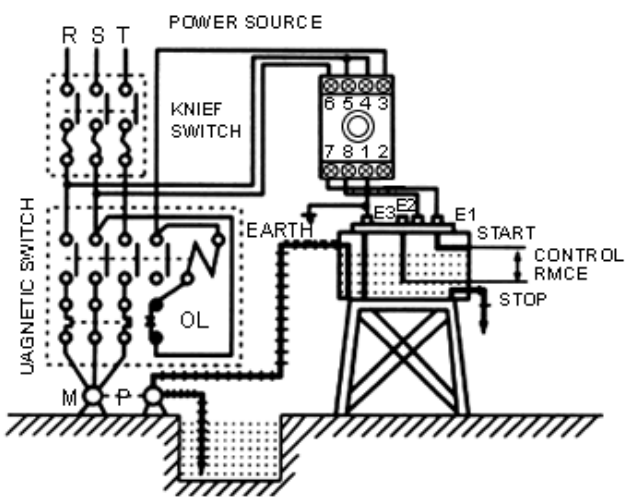

General Drainage Running

DIMENSIONS AFS-GR

