
ASN Key Selector Switches

No. of Positions

Shape

Contact Arrangement Chart

ASN∗K



- Cylinder: Chrome-plated
- Round bezel (metal): Chrome-plated
- On the spring-returned types, the keys can be released only from the maintained position. On the maintained types, the key can be released from every position. Key retained positions are also available. See page 12.
- Key selector switch is supplied with two standard keys. Two different keys are available upon request.
- Nameplates are ordered separately.

90° 2-position


Contact Code (ASN)	Contact Block: Mounting Position	Contact Block: Type	Operator Position: L	Operator Position: R	Maintained	Spring Return from Right	Maintained	Spring Return from Left
			L ⟨ R	L ⟨ R	L ⟨ R	L ⟨ R	L ⟨ R	L ⟨ R
10 (1NO)	1	NO		●	ASN3K10	ASN4K10	—	—
	2	Dummy						
11 (1NO-1NC)	1	NO		●	ASN3K11	ASN4K11		
	2	NC	●					
20 (2NO)	1	NO		●	ASN3K20	ASN4K20		
	2	NO		●				
22 (2NO-2NC)	1	NO		●	ASN3K22	ASN4K22		
	2	NC	●					
	3	NO		●				
	4	NC	●					
7S (1NO-1NC)	1	NO		▬	ASN3K7S	ASN4K7S		
	2	NC	▬					
10 (1NO)	1	NO	●		—	—	ASN30K10	ASN40K10
	2	Dummy						
11 (1NO-1NC)	1	NO	●				ASN30K11	ASN40K11
	2	NC		●				
20 (2NO)	1	NO	●				ASN30K20	ASN40K20
	2	NO	●					
22 (2NO-2NC)	1	NO	●				ASN30K22	ASN40K22
	2	NC		●				
	3	NO	●					
	4	NC		●				
7S (1NO-1NC)	1	NO	▬				ASN30K7S	ASN40K7S
	2	NC		▬				

45° 3-position


Contact Code (ASN)	Contact Block: Mounting Position	Contact Block: Type	Operator Position: L	Operator Position: C	Operator Position: R	Maintained	Spring Return from Left	Maintained	Spring Return from Right
			L C R	L C R	L C R	L C R	L C R	L C R	L C R
11 (1NO-1NC)	1	NO	●			ASN1K11	ASN2K11	—	—
	2	NC			●				
22 (2NO-2NC)	1	NO	●			ASN1K22	ASN2K22		
	2	NC			●				
	3	NO	●						
	4	NC			●				
5S (1NO-1NC) (1NO-1NC)	1	NO	●			ASN1K5S	ASN2K5S		
	2	NC			●				
	3	NO	▬						
	4	NC		▬					
7S (1NO-1NC)	1	NO	▬			ASN1K7S	ASN2K7S		
	2	NC		▬					
8S (2NO-2NC)	1	NO	▬			ASN1K8S	ASN2K8S		
	2	NC		▬					
	3	NO	▬						
	4	NC		▬					
11 (1NO-1NC)	1	NO			●	—	—	ASN10K11	ASN20K11
	2	NC	●						
22 (2NO-2NC)	1	NO			●			ASN10K22	ASN20K22
	2	NC	●						
	3	NO			●				
	4	NC	●						
5S (1NO-1NC) (1NO-1NC)	1	NO			●			ASN10K5S	ASN20K5S
	2	NC	●						
	3	NO		▬					
	4	NC	▬						
7S (1NO-1NC)	1	NO		▬				ASN10K7S	ASN20K7S
	2	NC	▬						
8S (2NO-2NC)	1	NO		▬				ASN10K8S	ASN20K8S
	2	NC	▬						
	3	NO		▬					
	4	NC	▬						

Dimensions


- **Knob Operator Type**

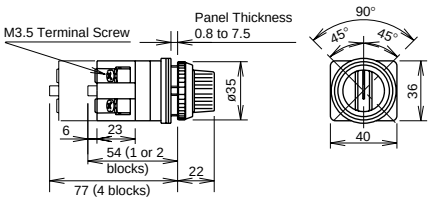


Dimensions of knob operator type marked with ★

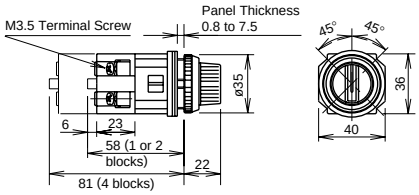


- **Lever Operator Type**

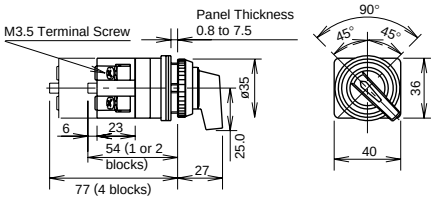

Dimensions of lever operator type marked with ★

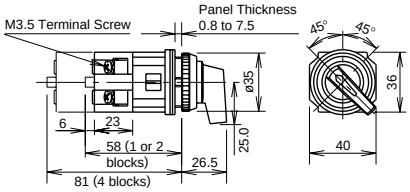


- **Key Selector Type**

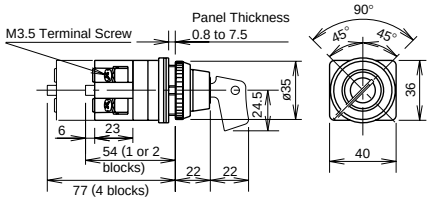

All dimensions in mm.

- **Contact Block Mounting Position and Contact Arrangement Chart**



		Left L	Center C	Right R	Operator Position
1	NO	●			
2	NO			●	
3	NC		▬		
4	NC	▬			